

3G SDI BULLET CAMERA

INSTRUCTION MANUAL



ACCESSORIES FURNISHED


Accessories	Mounting Bracket	Screw	Instruction Manual	OSD Manual
Q'ty	1	3	1	-
Option	-	-	-	1

SPECIFICATIONS

Camera	Image Device	1/3 Type Panasonic CMOS
	Scanning System	Progressive Scan
	Total Pixels	1956(H) x 1266(V) : 2.48Mega pixel
	Effective Pixels	1944(H) x 1092(V) : 2.12Mega pixel
	Lens	Board, Pinhole
	Min. Illumination	0.3Lux@F2.5, 30IRE
	Sync System	Internal
Video	Electronic Shutter	60Hz : 1/30~1/30,000sec, 50Hz : 1/25~1/30,000sec
	Output	HD-SDI (Max. 1080@60p), EX-SDI
	Resolution & frame rate	1080@60i/50i, 1080@60p/50p, 1080@30p/25p, 720@60p/50p, 720@30p/25p
OSD (Option)	On Screen Display	Built-in
	Language	English, Chinese, Chinese(S), Japanese, Korean
	LENS	DC/ MANUAL
	EXPOSURE	BRIGHTNESS/ AGC/ SHUTTER MODE& SPEED/ SENS-UP
	WHITE BALANCE	AWB/ATW/ PUSH LOCK/ MANUAL
	BACKLIGHT	OFF/ HLC/ BLC/ WDR
	DNR	OFF/ LOW/ MIDDLE/ HIGH
	DAY&NIGHT	AUTO/ COLOR/ B&W
	IMAGE	SHARPNESS/ COLOR LEVEL/ MIRROR/ FLIP/ LENS SHADING / GAMMA/ D-ZOOM/ ACE/ DEFOG
	SPECIAL	PRIVACY/ MOTION/ DIS
	SYSTEM	SDI OUT/ FORMAT/ FREQ/ CVBS OUT/ LANGUAGE/ CAM TITLE
Others	Operating Temperature	14°F~122°F (-10°C~+50°C)
	Storage Temperature	-4°F~140°F (-20°C~+60°C)
	Humidity	Less than 80%
	Power Consumption	DC12V(±10%), Max.150mA
	Option	Waterproof, Lens, Cable OSD function

DIMENSIONS

(unit : mm)

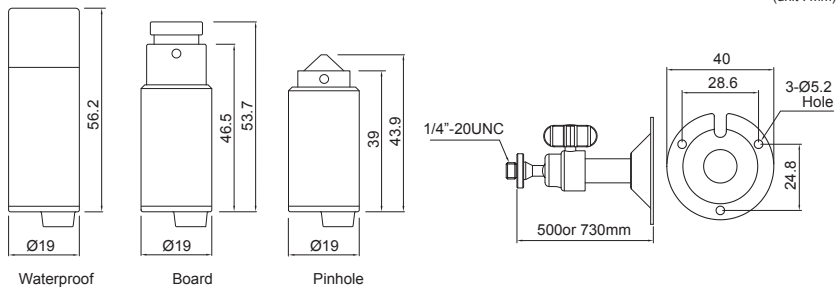

CONNECTIONS

