


VCQ2-222H



Features

- Sony 1/3" 960H Super HAD CCD II
- High Resolution of 700 TV Lines
- 0.1Lux@30IRE, F2.0
- f=3.6mm Fixed Lens
- 2D-DNR,HLC,D-WDR,OSD
- Motion Detection, Privacy Zones
- Digital Zoom
- Option : Cable OSD Key

Dimension

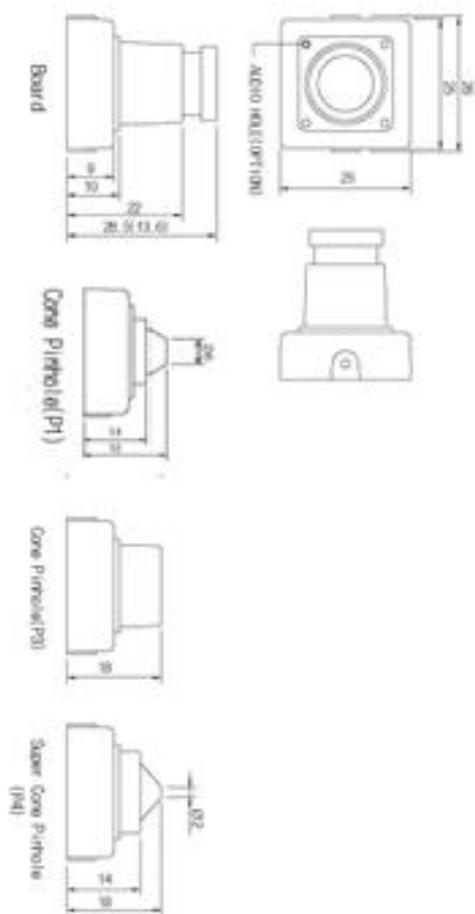


Specification


Signal System	NTSC	PAL
Total Pixels Number	1020(H) x 508(V) 520K	1020(H) x 596(V) 610K
Effective Pixels Number	976(H) x 494(V) 480K	976(H) x 582 (V) 570K
Pick-up Device	1/3" 960H Super HAD CCD II (SONY)	
Lens Fitted	Board,Pinhole Lens	
Signal Process	Digital Signal Process	
Scanning System	2:1 Interlace	
Sync. System	Internal	
Scanning Frequency	59.94Hz(VD)	50Hz(VD)
Resolution	700 TV lines	
S/N Ratio	More than 50dB (AGC Off)	
Video Output	1.0 Vpp composite(75Ω)	
Min. Illumination	0.1Lux @ 30IRE, F2.0	
OSD (option)	LENS	MANUAL, DC
	SHUTTER/AGC	SHUTTER : SHUT, SHUT+IRIS, IRIS
		AGC : OFF, AGC
	WHITE BALANCE	ATW, PUSH, USER1, USER2, ANTI CR, MANUAL, PUSH LOCK
	BACKLIGHT	OFF, BLC, HLC
	ATR	OFF, ON (Level adjustable)
	NR	OFF, ON (Level adjustable)
	DAYNIGHT	AUTO, COLOR, B/W
	PICT ADJUST	MIRROR, BRIGHTNESS, CONTRAST, SHARPNESS, HUE, GAIN
	MOTION DETECTION	OFF, ON (4 AREAS)
	PRIVACY	OFF, ON (4 AREAS)
	CAMERA ID	0~9, A~Z, Special Character
LANGUAGE	English, Japanese, German, French, Russian, Portuguese, Spanish, Chinese	
Shutter Speed	1/60 ~ 1/100,000sec	1/50 ~ 1/100,000sec
Power Consumption	DC12V, Max. 80mA	
Operating Temperature	-10℃ ~ 50℃ (Humidity : 0%RH ~ 80%RH)	
Storage Temperature	-20℃ ~ 60℃ (Humidity : 0%RH ~ 85%RH)	
Options	Lens, Cable OSD function, Exview CCD	

VCQ2-222H

Interface

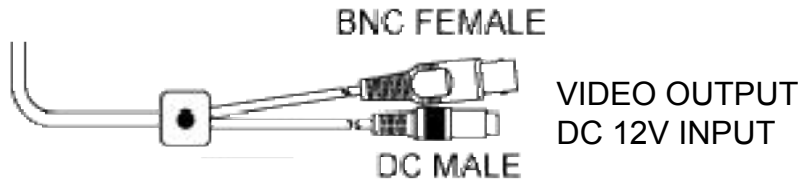

Standard Connection

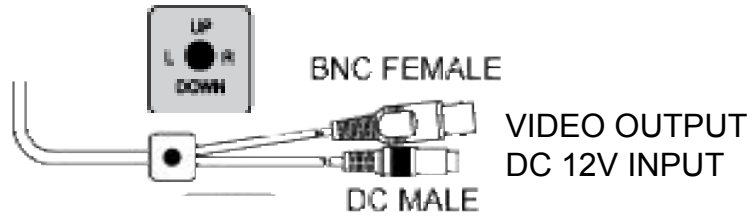

Cable OSD Connection

