

# HD SDI BULLET CAMERA

## INSTRUCTION MANUAL



### ACCESSORIES FURNISHED


Accessories	Mounting Bracket	Screw	Instruction Manual	OSD Manual
Q'ty	1	3	1	-
Option	-	-	-	1

### SPECIFICATIONS

Camera	Image Device	1/3 Type Panasonic CMOS
	Scanning System	Progressive Scan
	Total Pixels	1956(H) x 1266(V) : 2.48Mega pixel
	Effective Pixels	1944(H) x 1092(V) : 2.12Mega pixel
	Lens	Board, Pinhole
	Min. Illumination	0.3Lux@F2.5 , 30IRE
	Sync System	Internal
Video	Electronic Shutter	60Hz : 1/30~1/30,000sec, 50Hz : 1/25~1/30,000sec
	Output	HD SDI (SMPTE 274M)
	Resolution & frame rate	1080@30p/25p, 720@60p/50p
OSD (Option)	On Screen Display	Built-in
	Language	English, Chinese, Chinese(S), Japanese
	LENS	DC/ MANUAL
	EXPOSURE	BRIGHTNESS/ SHUTTER MODE& SPEED/ SENS-UP
	WHITE BALANCE	AWB/ATW/ PUSH LOCK/ MANUAL
	WDR/ BLC/ ACE	OFF/ WDR/ BLC/ ACE
	DNR	OFF/ LOW/ MIDDLE/ HIGH
	DAY&NIGHT	AUTO/ EXT/ COLOR/ B&W
	IMAGE	SHARPNESS/ COLOR LEVEL/ MIRROR/ FLIP/ LENS SHADING / GAMMA/ D-ZOOM/ DEFOG
	SPECIAL	COMM ADJUST/ PRIVACY/ HLC/ MOTION
	SYSTEM	FORMAT/ FPS/ FREQ/ CVBS SCALE/ CVBS OUT
	Others	Operating Temperature
Storage Temperature		-4°F~140°F (-20°C~+60°C)
Humidity		Less than 80%
Power Consumption		DC12V(±10%), Max.130mA
Option		Waterproof, Lens, Cable OSD function

### DIMENSIONS

(unit : mm)

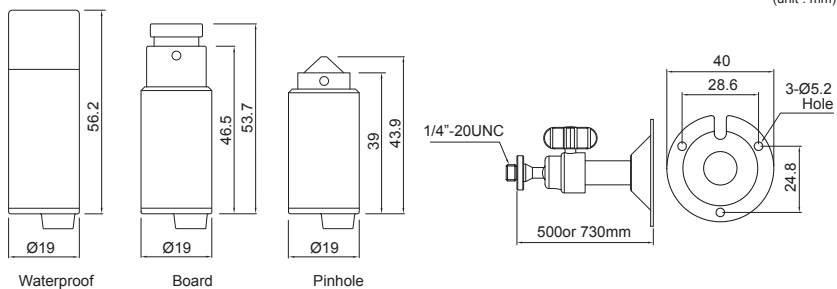

### CONNECTIONS

